



US006673088B1

(12) **United States Patent**
Vargas et al.(10) Patent No.: **US 6,673,088 B1**
(45) Date of Patent: ***Jan. 6, 2004**(54) **TISSUE PUNCH**(75) Inventors: **Jaime Vargas**, Palo Alto, CA (US);
Brendan M. Donohoe, San Francisco,
CA (US); **Scott C. Anderson**,
Sunnyvale, CA (US); **Theodore**
Bender, Palo Alto, CA (US); **Stephen**
Yencho, Menlo Park, CA (US);
Bernard Hausen, Menlo Park, CA
(US); **Michael Hendricksen**, Menlo
Park, CA (US); **James T. Nielsen**, San
Francisco, CA (US)(73) Assignee: **Cardica, Inc.**, Redwood City, CA (US)(*) Notice: This patent issued on a continued pro-
secution application filed under 37 CFR
1.53(d), and is subject to the twenty year
patent term provisions of 35 U.S.C.
154(a)(2).Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.(21) Appl. No.: **09/542,976**(22) Filed: **Apr. 4, 2000****Related U.S. Application Data**(63) Continuation-in-part of application No. 09/440,263, filed on
Nov. 15, 1999, now Pat. No. 6,371,964, which is a continu-
ation-in-part of application No. 09/314,278, filed on May 18,
1999, now Pat. No. 6,428,550.(51) Int. Cl.⁷ **A61B 17/34**(52) U.S. Cl. **606/185**(58) Field of Search **606/184, 185,**
606/174, 170, 187(56) **References Cited****U.S. PATENT DOCUMENTS**2,370,776 A 3/1945 Carlson
3,254,650 A 6/1966 Collito3,254,651 A 6/1966 Collito
3,519,187 A 7/1970 Kapitanov et al.
3,774,615 A 11/1973 Lim et al.
4,018,228 A * 4/1977 Goosen 606/184
4,118,806 A 10/1978 Porier et al.
4,214,587 A 7/1980 Sakura, Jr.
4,217,664 A 8/1980 Faso
4,350,160 A 9/1982 Kolesov et al.
4,352,358 A 10/1982 Angelchik
4,366,819 A 1/1983 Kaster
4,368,736 A 1/1983 Kaster
4,503,568 A 3/1985 Madras
4,523,592 A 6/1985 Daniel
4,534,761 A 8/1985 Raible
4,553,542 A 11/1985 Schenck et al.
4,577,631 A 3/1986 Kreamer
4,589,416 A 5/1986 Green

(List continued on next page.)

FOREIGN PATENT DOCUMENTSDE 29713335.7 11/1997
DE 19732234 1/1999
EP 0 701 800 3/1996
EP 0 885 595 12/1998
EP 0 938 870 9/1999
EP 0 820 724 1/2000


(List continued on next page.)

Primary Examiner—Kevin T. Truong(74) *Attorney, Agent, or Firm*—Brian A. Schar; Cindy A.
Lynch

(57)

ABSTRACT

A tissue punch for creating a hole in the wall of a target blood vessel for receiving an anastomosis device includes a piercing element for penetrating the tissue and a cutting element for cutting a plug of tissue around the pierced hole. The tissue punch includes a trocar for inserting the piercing element. After punching is complete, the piercing element is removed from the trocar through a side wall of the trocar so that a medical device can be deployed through the trocar lumen. The tissue punch may also include a tissue trap for trapping the plug of tissue.

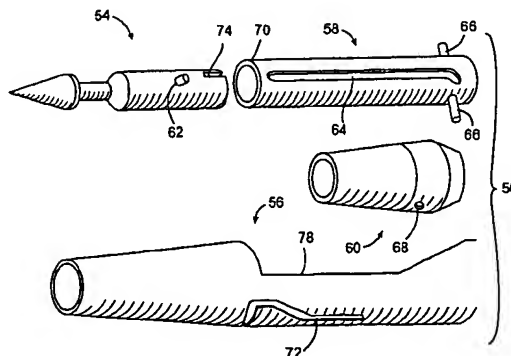5 Claims, 11 Drawing Sheets

U.S. PATENT DOCUMENTS




4,593,693 A	6/1986	Schenck	5,478,354 A	12/1995	Tovey et al.
4,603,693 A	8/1986	Conta et al.	5,503,635 A	4/1996	Sauer et al.
4,607,637 A	8/1986	Berggren et al.	5,515,478 A	5/1996	Wang
4,624,255 A	11/1986	Schenck et al.	5,522,834 A	6/1996	Fonger et al.
4,624,257 A	11/1986	Berggren et al.	5,524,180 A	6/1996	Wang et al.
4,657,019 A	4/1987	Walsh et al.	5,533,661 A	7/1996	Main et al.
4,665,906 A	5/1987	Jervis	5,540,677 A	7/1996	Sinofsky
4,721,109 A	1/1988	Healey	5,553,198 A	9/1996	Wang et al.
4,747,407 A	5/1988	Liu et al.	5,556,405 A	9/1996	Lary
4,752,024 A	6/1988	Green et al.	5,558,667 A	9/1996	Yarborough et al.
4,773,420 A	9/1988	Green	5,571,167 A	11/1996	Maginot
4,861,330 A	8/1989	Voss	5,643,340 A	7/1997	Nunokawa
4,875,815 A	10/1989	Phillips, II	5,645,520 A	7/1997	Nakamura et al.
4,883,453 A	11/1989	Berry et al.	5,657,429 A	8/1997	Wang et al.
4,892,098 A	1/1990	Sauer	5,669,918 A	9/1997	Balazs et al.
4,907,591 A	3/1990	Vasconcellos et al.	5,669,934 A	9/1997	Sawyer
4,917,087 A	4/1990	Walsh et al.	5,676,670 A	10/1997	Kim
4,917,090 A	4/1990	Berggren et al.	5,693,088 A	12/1997	Lazarus
4,917,091 A	4/1990	Berggren et al.	5,695,504 A	12/1997	Gifford, III et al.
4,930,674 A	6/1990	Barak	5,702,412 A	12/1997	Popov et al.
5,005,749 A	4/1991	Aranyi	5,707,362 A	1/1998	Yoon
5,015,238 A	5/1991	Solomon et al.	5,707,380 A	1/1998	Hinchliffe et al.
5,062,842 A	11/1991	Tiffany	5,709,335 A	1/1998	Heck
5,089,006 A	2/1992	Stiles	5,709,693 A	1/1998	Taylor
5,104,025 A	4/1992	Main et al.	5,725,544 A	3/1998	Rygaard
5,119,983 A	6/1992	Green et al.	5,725,553 A	3/1998	Moenning
5,129,913 A	7/1992	Ruppert	5,732,872 A	3/1998	Bolduc et al.
5,156,613 A	10/1992	Sawyer	5,754,741 A	5/1998	Wang et al.
5,156,619 A	10/1992	Ehrenfeld	5,755,778 A	5/1998	Kleshinski
5,171,262 A	12/1992	MacGregor	5,762,458 A	6/1998	Wang et al.
5,178,634 A	1/1993	Ramos Martinez	5,779,718 A	7/1998	Green et al.
5,187,796 A	2/1993	Wang et al.	5,792,135 A	8/1998	Madhani et al.
5,192,289 A	3/1993	Jessen	5,797,900 A	8/1998	Madhani et al.
5,193,731 A	3/1993	Aranyi	5,797,920 A	8/1998	Kim
5,205,459 A	4/1993	Brinkerhoff et al.	5,799,661 A	9/1998	Boyd et al.
5,211,683 A	5/1993	Maginot	5,799,857 A	9/1998	Robertson et al.
5,217,474 A	6/1993	Zacca et al.	5,807,377 A	9/1998	Madhani et al.
5,221,281 A	6/1993	Klicek	5,814,073 A	9/1998	Bonutti
5,222,963 A	6/1993	Brinkerhoff et al.	5,815,640 A	9/1998	Wang et al.
5,234,447 A	8/1993	Kaster et al.	5,817,113 A	10/1998	Gifford, III et al.
5,250,058 A	10/1993	Miller et al.	5,827,316 A	10/1998	Young et al.
5,250,060 A	10/1993	Carbo et al.	5,833,698 A	11/1998	Hinchliffe et al.
5,271,544 A	12/1993	Fox et al.	5,841,950 A	11/1998	Wang et al.
5,275,322 A	1/1994	Brinkerhoff et al.	5,855,583 A	1/1999	Wang et al.
5,285,945 A	2/1994	Brinkerhoff et al.	5,868,763 A	2/1999	Spence et al.
5,290,298 A	3/1994	Rebuffat et al.	5,871,495 A	2/1999	Mueller
5,292,053 A	3/1994	Bilotti et al.	5,875,782 A	3/1999	Ferrari et al.
5,304,220 A	4/1994	Maginot	5,878,193 A	3/1999	Wang et al.
5,314,435 A	5/1994	Green et al.	5,879,371 A	3/1999	Gardiner et al.
5,314,468 A	5/1994	Martinez	5,881,943 A	3/1999	Heck et al.
5,326,205 A	7/1994	Anspach, Jr. et al.	5,893,369 A	4/1999	Lemole
5,333,773 A	8/1994	Main et al.	5,904,697 A	5/1999	Gifford, III et al.
5,336,233 A	8/1994	Chen	5,907,664 A	5/1999	Wang et al.
5,350,104 A	9/1994	Main et al.	5,910,153 A *	6/1999	Mayenberger 606/184
5,354,302 A	10/1994	Ko	5,911,036 A	6/1999	Wright et al.
5,364,389 A	11/1994	Anderson	5,915,616 A	6/1999	Viola et al.
5,366,462 A	11/1994	Kaster et al.	5,921,995 A	7/1999	Kleshinski
5,392,979 A	2/1995	Green et al.	5,944,730 A	8/1999	Nobles et al.
5,395,030 A	3/1995	Kuramoto et al.	5,947,363 A	9/1999	Bolduc et al.
5,395,311 A	3/1995	Andrews	5,957,363 A	9/1999	Heck
5,401,131 A	3/1995	Yoshino	5,968,089 A	10/1999	Krajicek
5,403,338 A	4/1995	Milo	5,972,014 A *	10/1999	Nevins 606/185
5,443,497 A	8/1995	Venbrux	5,976,159 A	11/1999	Bolduc et al.
5,447,514 A	9/1995	Gerry et al.	5,989,278 A	11/1999	Mueller
5,454,825 A	10/1995	Van Leeuwen	6,001,124 A	12/1999	Bachinski
5,456,712 A	10/1995	Maginot	6,007,544 A	12/1999	Kim
5,456,714 A	10/1995	Owen	6,013,190 A	1/2000	Berg et al.
5,464,449 A	11/1995	Ryan et al.	6,015,416 A	1/2000	Stefanchik et al.
5,465,895 A	11/1995	Knodel et al.	6,022,367 A	2/2000	Sherfs
5,470,320 A	11/1995	Tiefenbrun et al.	6,024,748 A	2/2000	Manzo et al.

US 6,673,088 B1

Page 3

6,030,370 A	2/2000	Kupka et al.	WO	WO98/19634	5/1998
6,030,395 A	2/2000	Nash et al.	WO	WO98/19636	5/1998
6,036,699 A	3/2000	Andreas et al.	WO	98/30153	7/1998
6,036,700 A	3/2000	Stefanchik et al.	WO	98/37814	9/1998
6,036,702 A	3/2000	Bachinski et al.	WO	98/40036	9/1998
6,036,703 A	3/2000	Evans et al.	WO	WO98/42262	10/1998
6,036,704 A	3/2000	Yoon	WO	98/47430	10/1998
6,036,705 A	3/2000	Nash et al.	WO	98/55027	12/1998
6,050,472 A	4/2000	Shibata	WO	99/08603	2/1999
6,053,390 A	4/2000	Green et al.	WO	99/11178	3/1999
6,056,762 A	5/2000	Nash et al.	WO	WO99/17665	4/1999
6,066,144 A	5/2000	Wolf et al.	WO	99/18887	4/1999
6,066,148 A	5/2000	Rygaard	WO	99/21491	5/1999
6,068,637 A	5/2000	Popov et al.	WO	99/37218	7/1999
6,074,416 A	6/2000	Berg et al.	WO	WO99/38441	8/1999
6,080,167 A	6/2000	Lyell	WO	WO99/38454	8/1999
6,080,173 A	6/2000	Williamson, IV et al.	WO	99/40851	8/1999
6,083,234 A	7/2000	Nicholas et al.	WO	99/40868	8/1999
6,110,188 A	8/2000	Narciso, Jr.	WO	WO99/45848	9/1999
6,113,612 A	9/2000	Swanson et al.	WO	99/52481	10/1999
6,117,148 A	9/2000	Ravo et al.	WO	99/62406	12/1999
6,120,432 A	9/2000	Sullivan et al.	WO	99/62409	12/1999
6,146,393 A	11/2000	Wakabayashi	WO	99/62415	12/1999
6,149,681 A	11/2000	Houser et al.	WO	WO99/63910	12/1999
6,152,937 A	11/2000	Peterson et al.	WO	WO99/65409	12/1999
6,152,945 A	11/2000	Bachinski et al.	WO	00/09040	2/2000
6,165,185 A	12/2000	Shennib et al.	WO	00/10486	3/2000
6,167,889 B1	1/2001	Benetti	WO	00/12013	3/2000
6,171,319 B1	1/2001	Nobles et al.	WO	00/15144	3/2000
6,171,321 B1	1/2001	Gifford, III et al.	WO	00/15146	3/2000
6,176,413 B1	1/2001	Heck et al.	WO	00/15147	3/2000
6,176,864 B1	1/2001	Chapman	WO	00/15148	3/2000
6,186,942 B1	2/2001	Sullivan et al.	WO	00/15149	3/2000
6,187,019 B1	2/2001	Stefanchik et al.	WO	00/27310	5/2000
6,187,020 B1	2/2001	Zegdi et al.	WO	00/27311	5/2000
6,190,396 B1	2/2001	Whitin et al.	WO	00/27312	5/2000
6,190,397 B1	2/2001	Spence et al.	WO	00/27313	5/2000
6,190,590 B1	2/2001	Randall et al.	WO	00/33745	6/2000
6,193,129 B1	2/2001	Bitner et al.	WO	00/41633	7/2000
6,193,734 B1	2/2001	Bolduc et al.	WO	00/53104	9/2000
6,206,912 B1	3/2001	Goldstein et al.	WO	00/56223	9/2000
6,206,913 B1	3/2001	Yencho et al.	WO	00/56226	9/2000
6,391,036 B1	5/2002	Berg et al.	WO	00/56227	9/2000
2002/0082614 A1	6/2002	Logan et al.	WO	00/56228	9/2000
FOREIGN PATENT DOCUMENTS			WO	00/59380	10/2000
EP	0 820 725	1/2000	WO	00/66007	11/2000
EP	0 913 125	7/2000	WO	00/66009	11/2000
EP	0 990 420	12/2000	WO	00/69343	11/2000
FR	2316910	4/1977	WO	00/69346	11/2000
WO	WO92/08513	5/1992	WO	00/69349	11/2000
WO	0/517252	12/1992	WO	00/69364	11/2000
WO	96-25886	8/1996	WO	00/72764	12/2000
WO	97/25002	7/1997	WO	00/74579	12/2000
WO	97/27898	8/1997	WO	00/76405	12/2000
WO	97/31575	9/1997	WO	01/08601	2/2001
WO	97/47261	12/1997	WO	01/12074	2/2001
WO	98/07399	2/1998	WO	01/15607	3/2001
WO	98/19608	5/1998	WO	01/17440	3/2001
WO	WO98/19618	5/1998	WO	01/19257	3/2001
WO	98/19625	5/1998	WO	01/19259	3/2001
WO	WO98/19629	5/1998	WO	01/19284	3/2001
WO	98/19630	5/1998	WO	01/34037	5/2001
WO	98/19631	5/1998	WO	WO 02/47532	6/2002
WO	98/19632	5/1998	WO	WO 02/47561	6/2002

* cited by examiner

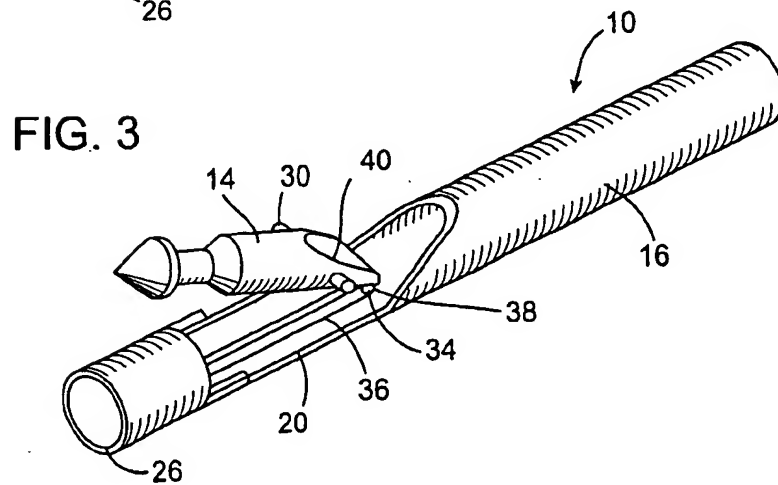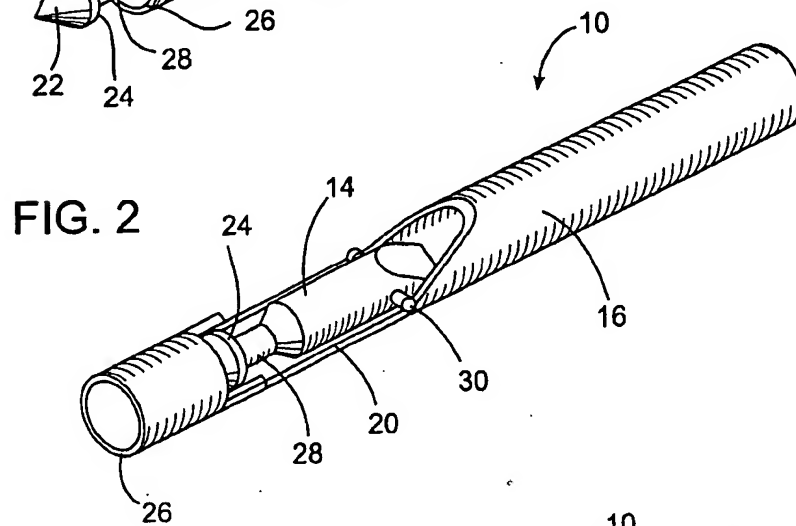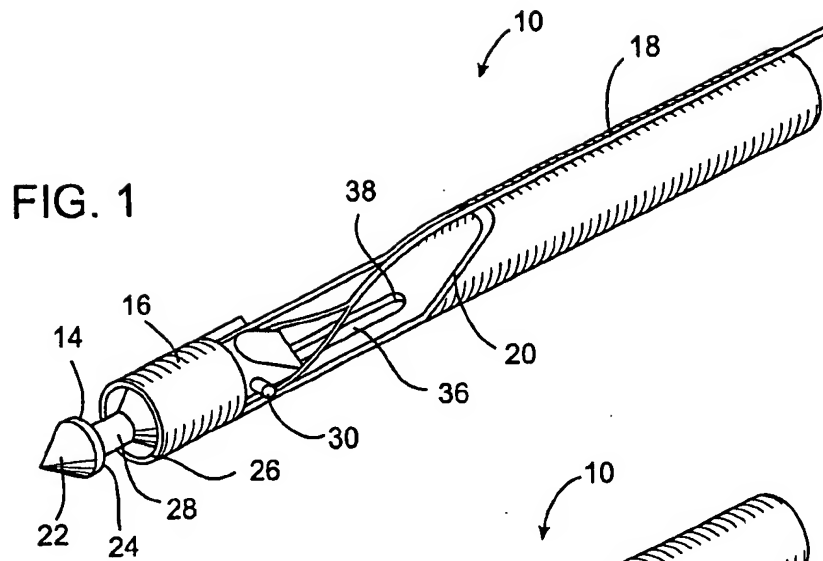

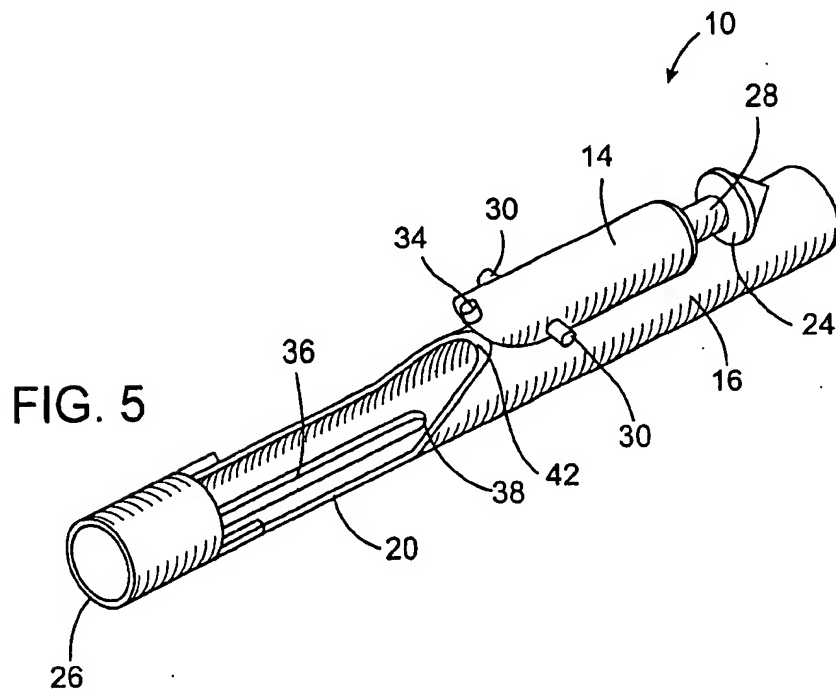
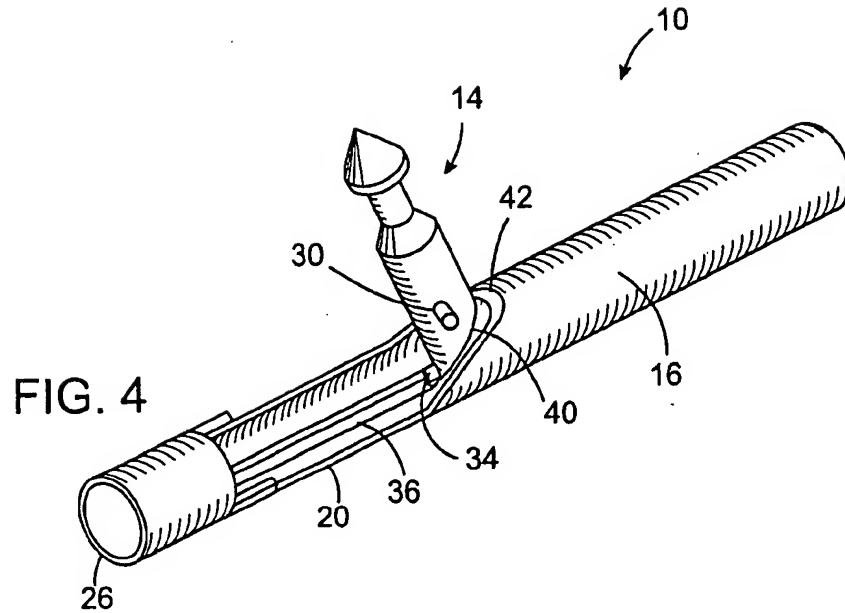


FIG. 6

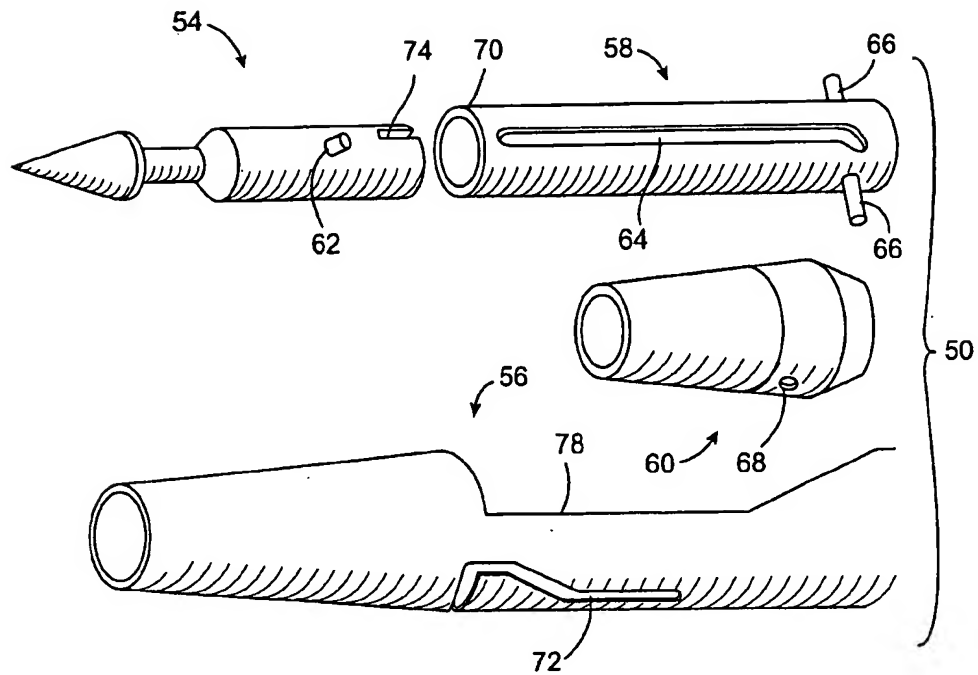


FIG. 7

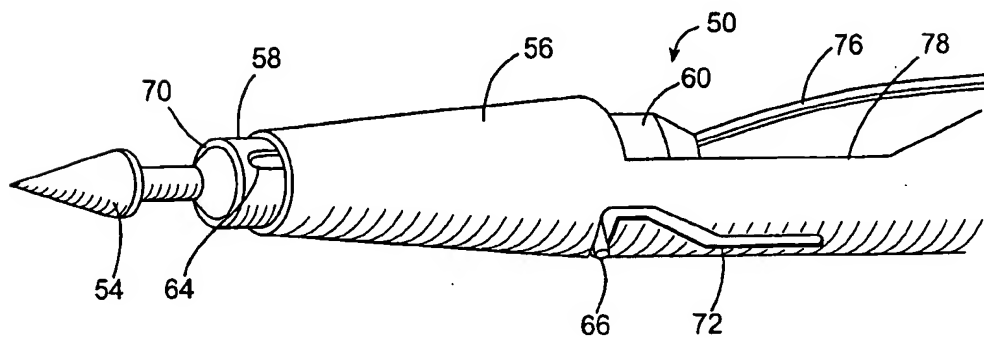


FIG. 8

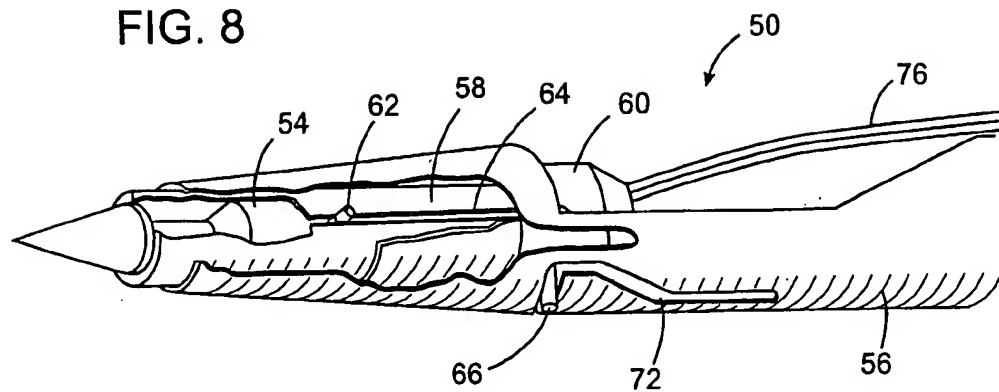


FIG. 9

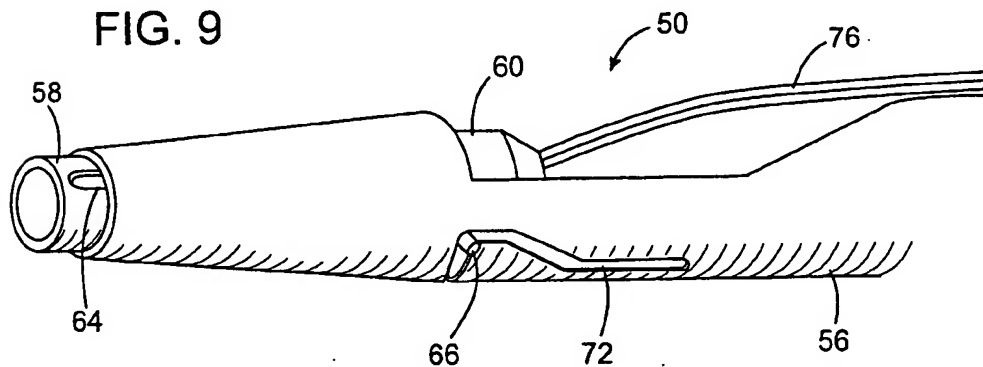


FIG. 10

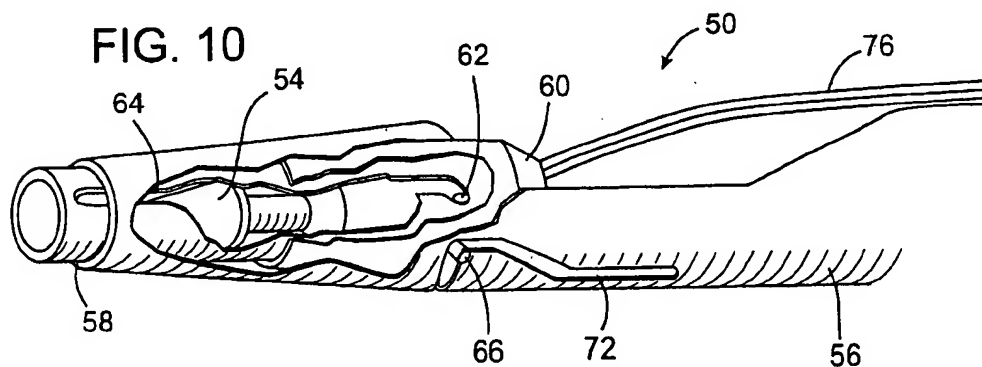


FIG. 11

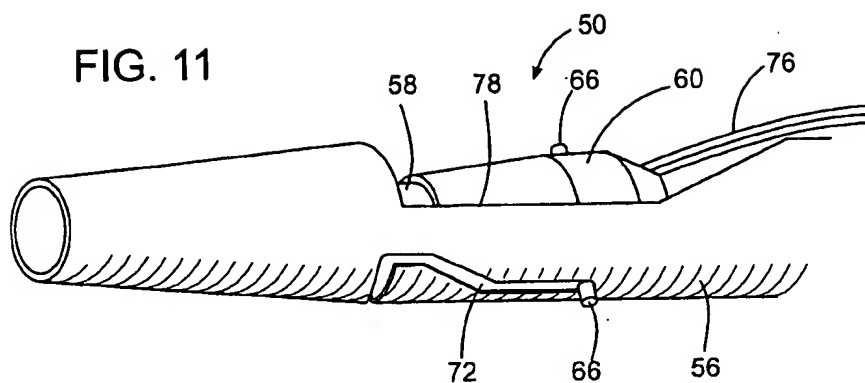


FIG. 12

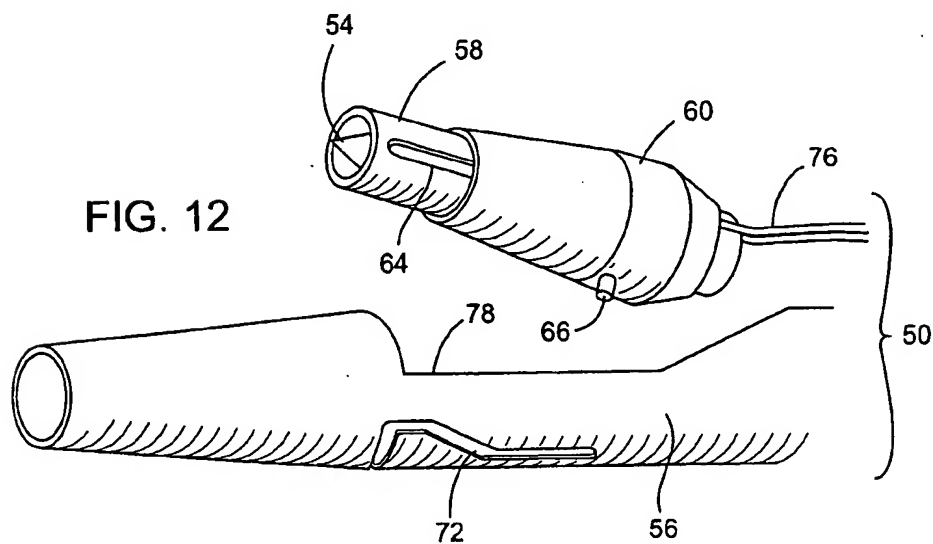


FIG. 13

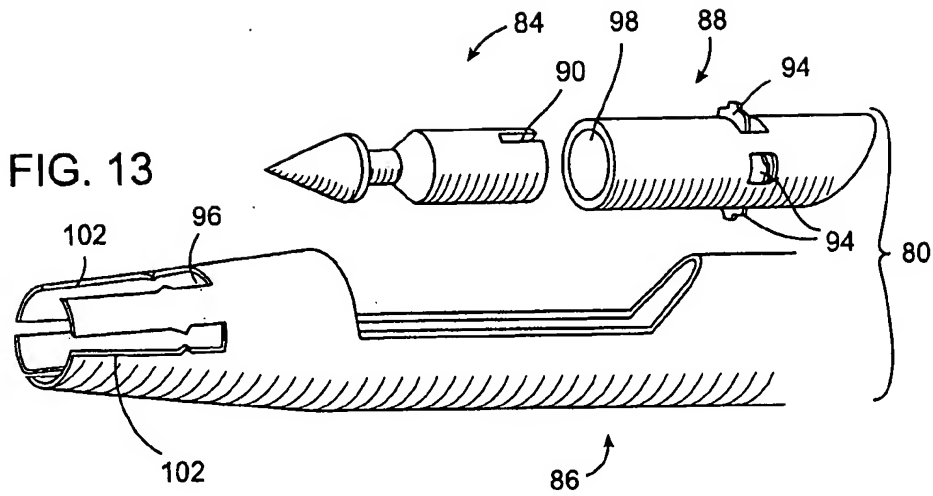


FIG. 14

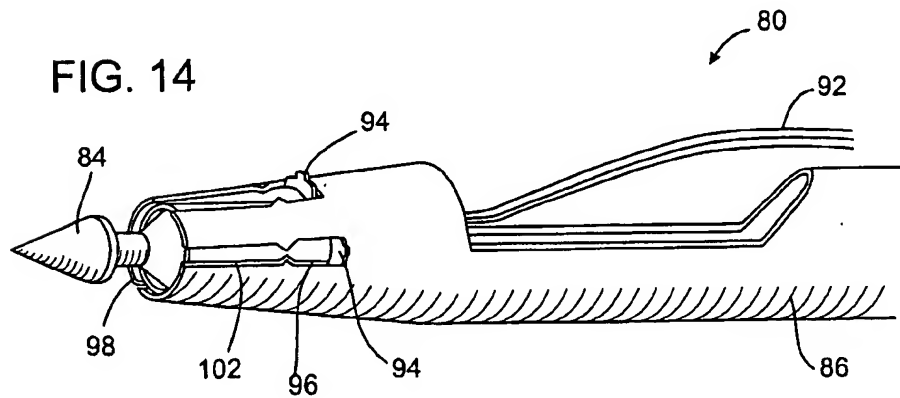
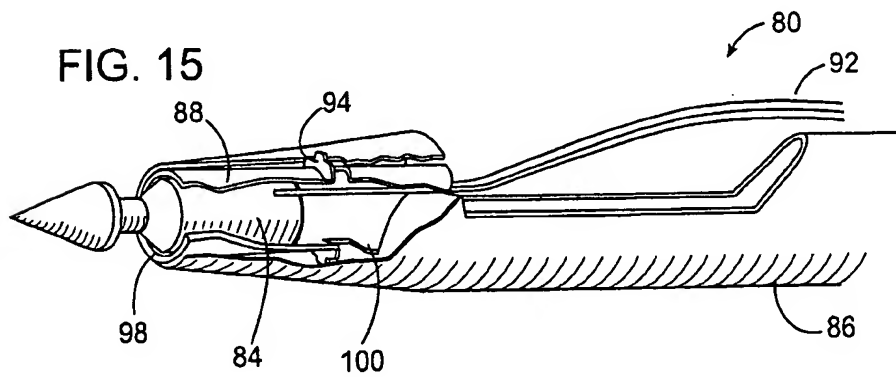
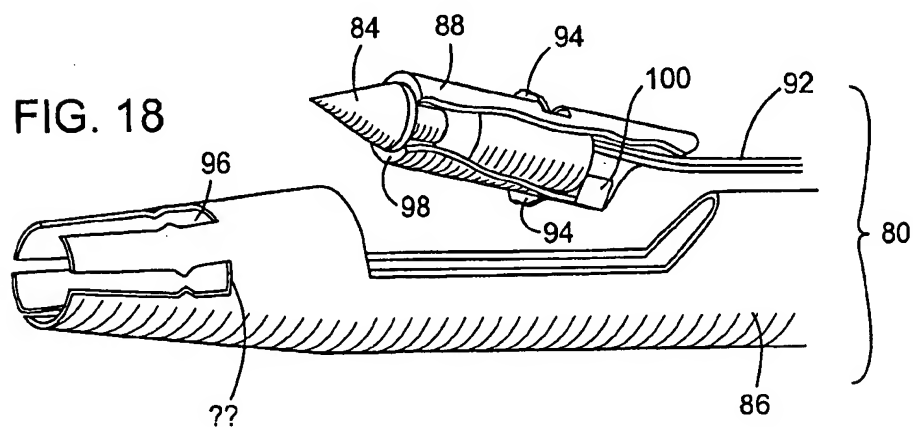
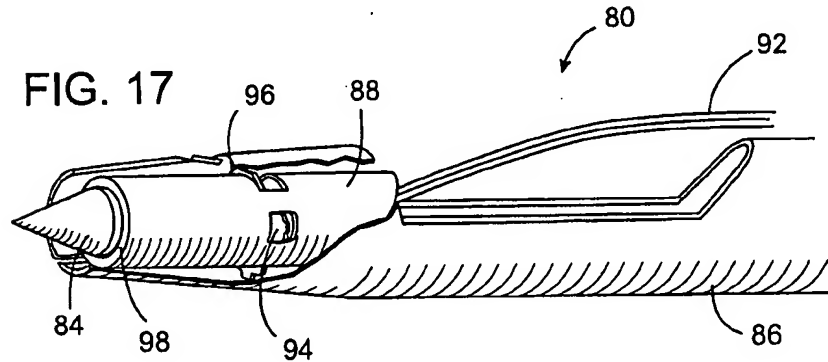
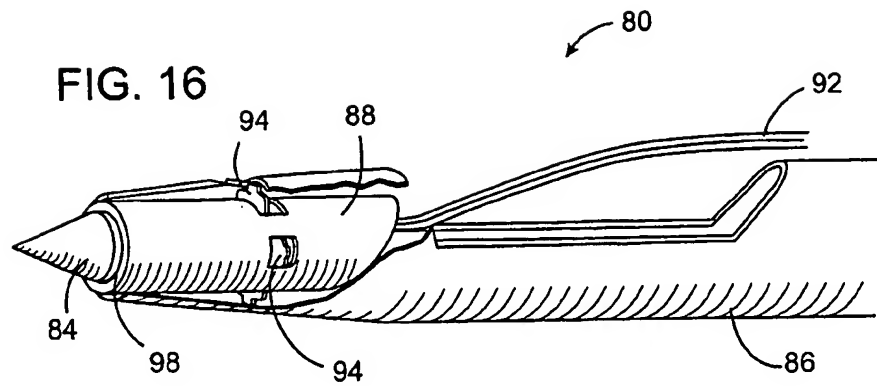
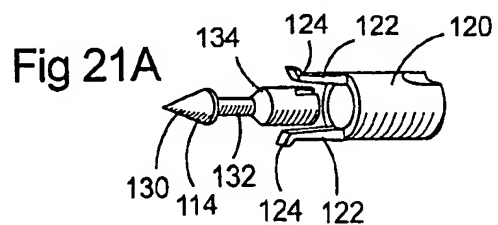
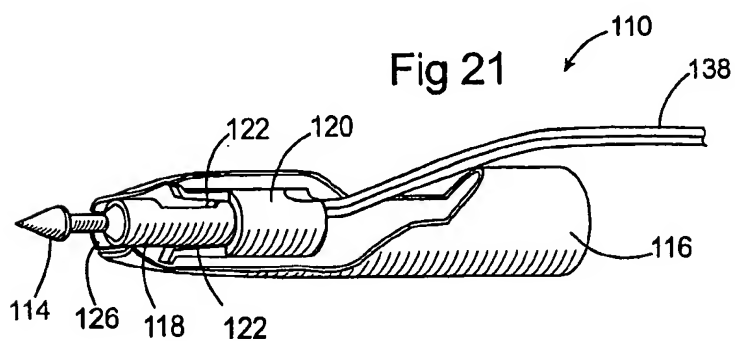
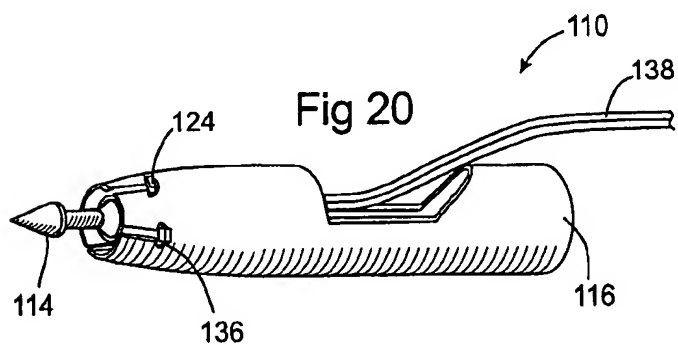
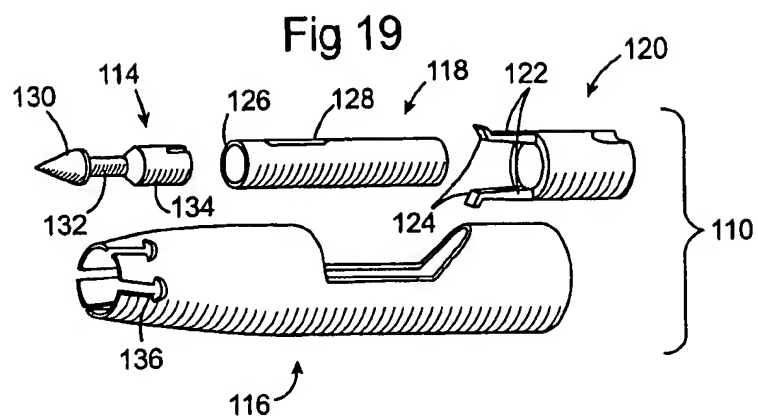


FIG. 15







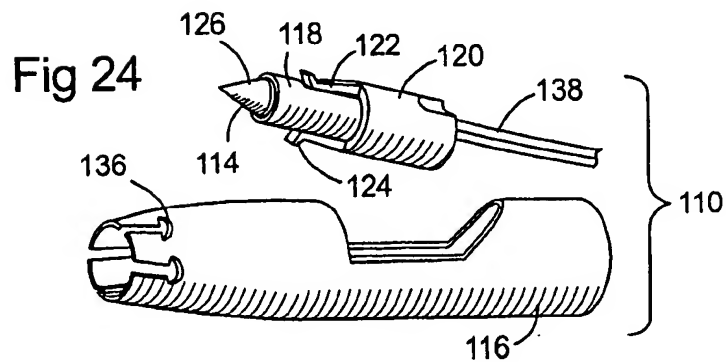
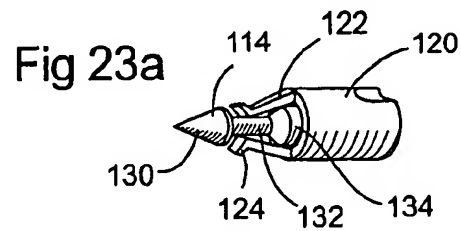
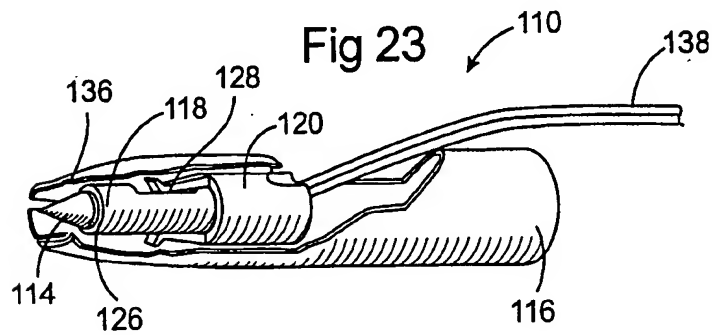
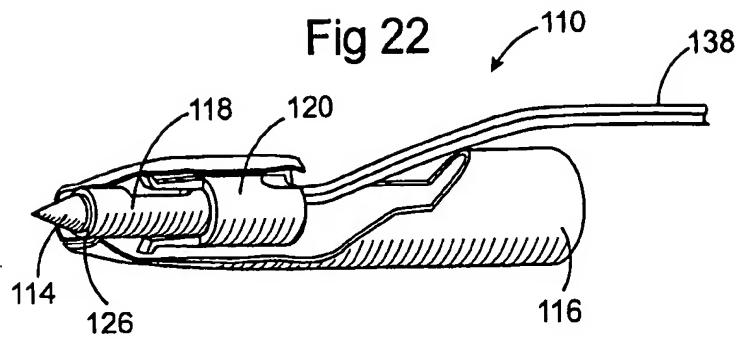


FIG. 28

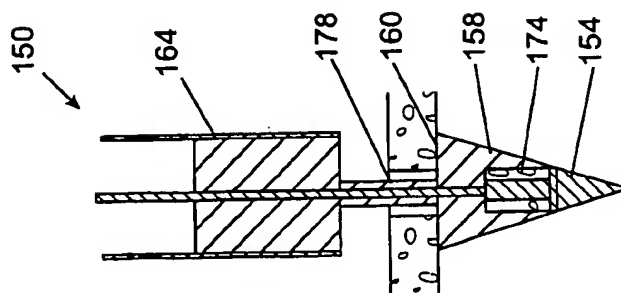


FIG. 27

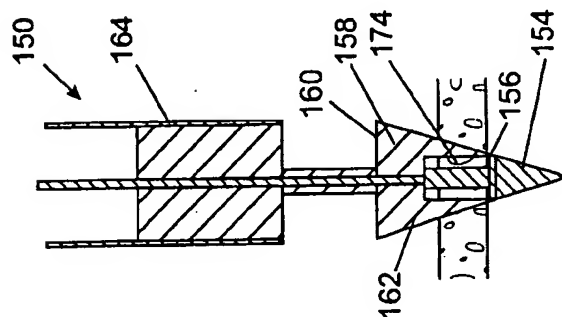


FIG. 26

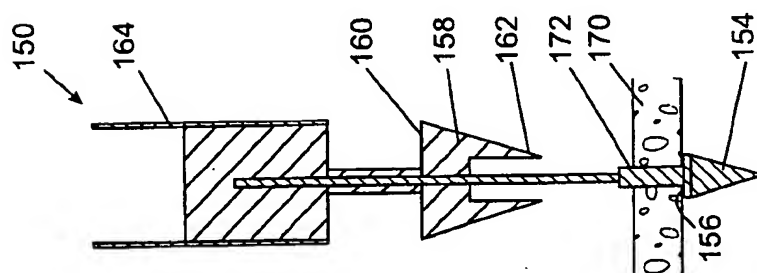


FIG. 25

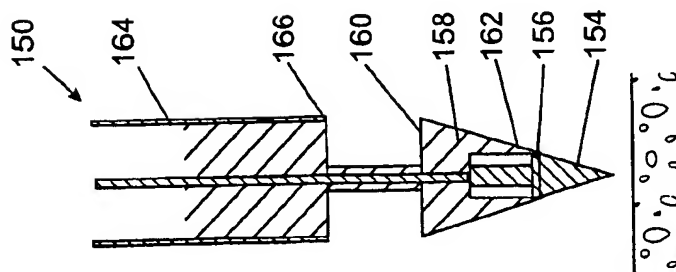


FIG. 29


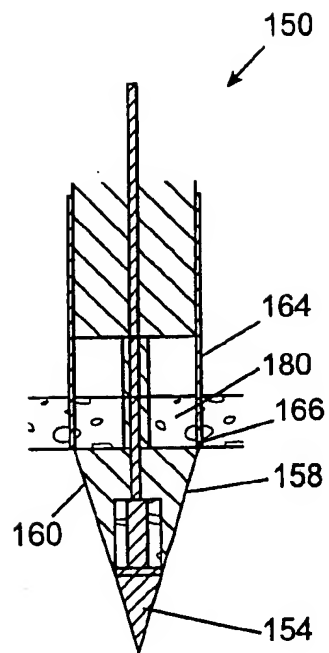


FIG. 30

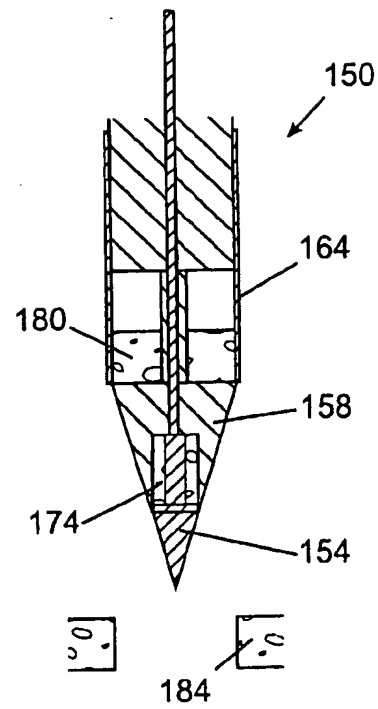

1

TISSUE PUNCH

This application is a continuation-in-part of application Ser. No. 09/440,263 filed Nov. 15, 1999 now U.S. Pat. No. 6,371,964, which is a continuation-in-part of application Ser. No. 09/314,278 filed May 18, 1999 now U.S. Pat. No. 6,428,550, both of which are incorporated herein by reference in their entirety.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The invention relates to a tissue punch, and more particularly, the invention relates to a tissue punch for forming an opening in a target blood vessel for deploying an anastomosis device to connect a graft vessel to the target blood vessel.

2. Brief Description of the Related Art

Vascular anastomosis is a procedure by which two blood vessels within a patient are surgically joined together. Vascular anastomosis is performed during treatment of a variety of conditions including coronary artery disease, diseases of the great and peripheral vessels, organ transplantation, and trauma. In coronary artery disease (CAD) an occlusion or stenosis in a coronary artery interferes with blood flow to the heart muscle. Treatment of CAD involves the grafting of a vessel in the form of a prosthesis or harvested artery or vein to reroute blood flow around the occlusion and restore adequate blood flow to the heart muscle. This treatment is known as coronary artery bypass grafting (CABG).

In the conventional CABG, a large incision is made in the chest and the sternum is sawed in half to allow access to the heart. In addition, a heart lung machine is used to circulate the patient's blood so that the heart can be stopped and the anastomosis can be performed. During this procedure, the aorta is clamped which can lead to trauma of the aortic tissue and/or dislodge plaque emboli, both of which increase the likelihood of neurological complications. In order to minimize the trauma to the patient induced by conventional CABG, less invasive techniques have been developed in which the surgery is performed through small incisions in the patient's chest with the aid of visualizing scopes. Less invasive CABG can be performed on a beating or stopped heart and thus may avoid the need for cardiopulmonary bypass.

In both conventional and less invasive CABG procedures, the surgeon has to suture one end of the graft vessel to the coronary artery and the other end of the graft vessel to a blood supplying vein or artery. The suturing process is a time consuming and difficult procedure requiring a high level of surgical skill. In order to perform the suturing of the graft to the coronary artery and the blood supplying artery the surgeon must have relatively unobstructed access to the anastomosis site within the patient. In the less invasive surgical approaches, some of the major coronary arteries including the ascending aorta cannot be easily reached by the surgeon because of their location. This makes suturing either difficult or impossible for some coronary artery sites. In addition, some target vessels, such as heavily calcified coronary vessels, vessels having very small diameter, and previously bypassed vessels may make the suturing process difficult or impossible.

Accordingly, it would be desirable to provide a sutureless vascular anastomosis device which easily connects a graft vessel to a target vessel and can be deployed in limited space.

Deployment of a sutureless anastomosis device, such as those described in U.S. patent application Ser. No. 09/314,

2

278, involves forming an opening in the target vessel and inserting the anastomosis device with a graft vessel attached into the opening. Accordingly, it would be desirable to provide a one piece tool which can perform both tissue punching and anastomosis device deployment. In order to provide a one piece device it would be desirable to provide a tissue punch which is advanced through a trocar and then is moved out of the trocar to allow deployment of the anastomosis device through the same trocar.

SUMMARY OF THE INVENTION

The present invention relates to a tissue punch for forming an opening in a target blood vessel for deploying an anastomosis device to connect a graft vessel to the target vessel.

In accordance with one aspect of the present invention, an apparatus for piercing a vessel, punching a hole in the vessel, removing punched tissue from the vessel, and introducing an object into the vessel through the punched hole is described. The apparatus includes a punch with a pointed piercing end for piercing a vessel to allow introduction of the punch into the vessel, a tubular element arranged coaxially with the punch through which the punch retracts to remove vessel tissue, and an introducer located coaxially around the tubular element. The introducer includes an area into which the punch and tubular element can be moved to allow introduction of an object into the punched hole in the vessel through the introducer.

In accordance with another aspect of the present invention, a tissue punch includes a piercing element, a cutting edge, and a trocar receiving the piercing element. The piercing element has a pointed distal end, a tissue receiving space, and an anvil adjacent the tissue receiving space. The cutting edge is arranged to contact the anvil to cut a piece of tissue. The trocar has a side opening for removing the piercing element from the trocar after punching tissue.

In accordance with an additional aspect of the present invention, a method of punching a plug of tissue from the wall of a blood vessel includes the steps of penetrating the wall of the blood vessel with a piercing element to form an opening in the blood vessel, punching a plug of tissue around the opening in the blood vessel, and inserting a trocar into the punched hole in the blood vessel.

In accordance with a further aspect of the invention, a double tissue punch includes a piercing element having a pointed distal end and a first anvil surface; a first cutting element movable with respect to the piercing element, the first cutting element having a cutting edge arranged to contact the first anvil surface; and the first cutting element having a second anvil surface, a second cutting element movable with respect to the piercing element and the first cutting element, the second cutting element having a cutting edge arranged to contact the second anvil surface.

The present invention provides advantages of a tissue punch which is deployed through a trocar and is removed through a side wall of the trocar so that the trocar can subsequently be used for deployment of a medical device. The invention also provides the advantage of trapping a tissue plug which is cut by the tissue punch.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described in greater detail with reference to the preferred embodiments illustrated in the accompanying drawings, in which like elements bear like reference numerals, and wherein:

FIG. 1 is a perspective view of a tissue punch according to the present invention in a tissue penetrating position;

3

FIG. 2 is a perspective view of the tissue punch of FIG. 1 with the piercing element withdrawn inside the trocar;

FIG. 3 is a perspective view of the tissue punch of FIG. 1 as the piercing element is pivoted out of the trocar;

FIG. 4 is a perspective view of the tissue punch of FIG. 1 with the piercing element pivoted further;

FIG. 5 is a perspective view of the tissue punch of FIG. 1 with the piercing element completely removed from the trocar;

FIG. 6 is an exploded perspective view of a tissue punch having a cam release system;

FIG. 7 is a perspective view of the tissue punch of FIG. 6 in an assembled, tissue penetrating position;

FIG. 8 is a partially cut away perspective view of the tissue punch of FIG. 6 in a tissue cutting position;

FIG. 9 is a perspective view of the tissue punch of FIG. 6 after tissue punching is completed;

FIG. 10 is a partially cut away view of FIG. 9;

FIG. 11 is a perspective view of the tissue punch of FIG. 6 with the piercing element and tissue trap partially removed from the trocar;

FIG. 12 is a perspective view of the tissue punch of FIG. 6 with the piercing element and tissue trap completely removed from the trocar;

FIG. 13 is an exploded perspective view of a tissue punch having a bendable tab release system;

FIG. 14 is a perspective view of the tissue punch of FIG. 13 in an assembled tissue penetrating position;

FIG. 15 is a partially cut away view of FIG. 14;

FIG. 16 is a partially cut away perspective view of the tissue punch of FIG. 13 after tissue cutting is completed;

FIG. 17 is a partially cut away perspective view of the tissue punch of FIG. 13 with the piercing element and tissue trap partially removed from the trocar;

FIG. 18 is a partially cut away perspective view of the tissue punch of FIG. 13 with the piercing element and tissue trap completely removed from the trocar;

FIG. 19 is an exploded perspective view of a tissue punch having a snap release system;

FIG. 20 is a perspective view of the tissue punch of FIG. 19 in an assembled tissue penetrating position;

FIG. 21 is a partially cut away view of FIG. 20;

FIG. 21 A is an isolated perspective view of the piercing element and tissue trap of FIG. 21;

FIG. 22 is a partially cut away perspective view of the tissue punch of FIG. 19 after tissue punching is completed;

FIG. 23 is a partially cut away perspective view of the tissue punch of FIG. 19 with the piercing element and tissue trap partially removed from the trocar;

FIG. 23A is an isolated perspective view of the piercing element and tissue trap of FIG. 23;

FIG. 24 is a perspective view of the tissue punch of FIG. 19 with the piercing element and tissue trap completely removed from the trocar; and

FIGS. 25-30 are schematic side views of a double tissue punch showing a series of steps in a punching sequence with the double tissue punch.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The tissue punch according to the present invention is used to create a hole in a wall of a target blood vessel for

4

receiving an anastomosis device to connect a graft vessel to the target vessel. The tissue punch includes a piercing element for penetrating the target vessel wall, a cutter for cutting a plug of tissue, and a trocar which is inserted in the opening in the wall after punching has been completed. After punching is complete, the piercing element is removed from the trocar and the anastomosis device is then deployed through the open lumen of the trocar.

The tissue punch according to the present invention is particularly useful for use in coronary artery bypass grafting (CABG) in which a graft vessel is connected at opposite ends to the aorta and to a coronary artery. However, the target vessel which is punched with the tissue punch can be any vessel including but not limited to the aorta, coronary artery, and arteries leading to the arms or head. The graft vessel for connection to the target vessel can be an arterial graft, a venous graft, or a synthetic prosthesis, as required. The anastomosis procedure is preferably performed with minimally invasive procedures, without the stoppage of blood flow in the target vessel, and without the use of cardiopulmonary bypass. However, the anastomosis procedure may also be performed as a stopped heart and/or open chest procedure.

Preferably, the tissue punches according to the present invention are incorporated in a one piece tool which performs tissue punching and deployment of the anastomosis device. This one piece tool may be operated manually, such as by cams, or automatically, such as pneumatically.

FIG. 1 is a perspective view of a tissue punch 10 according to the invention which includes a one-piece piercing element 14 positioned within an introducer sheath or trocar 16. The piercing element 14 can be advanced and retracted in the trocar 16 by an elongated member 18 such as a spring steel strap or cable which extends through an opening 20 in a side of the trocar. The piercing element 14 includes a pointed distal tip 22 for penetrating the target vessel wall and a narrow shaft portion 28 around which the tissue of the target vessel wall contracts after piercing. The distal tip 12 may be formed, for example, as a conical surface or by a plurality of ground surfaces extending to a point at the distal tip. An anvil surface 24 is located on the piercing element 14 between the distal tip 22 and the shaft 28. The anvil surface 24 acts with a cutting edge 26 of the trocar 16 to cut an annular plug of tissue.

In operation, the piercing element 14 is forcibly advanced to puncture the target vessel wall. After piercing, the tissue of the target vessel wall rests around the shaft portion 28 of the piercing element 14. The piercing element 14 is then pulled back inside the trocar 16 by the elongated member 18 to cut an annular plug of tissue by compressing the tissue between the anvil surface 24 of the piercing element and the cutting edge 26 of the trocar 16. The cut plug of tissue can be trapped in an annular space surrounding the shaft 28 and removed from the surgical site on the piercing element 14.

By using the tissue punch 10 to cut a plug of the target vessel wall tissue in this manner, there is less tendency for tearing. In particular, the punched opening in the vessel wall is less apt to tear than an incision or puncture. A puncture opening is particularly apt to tear when an anastomosis device is inserted into the opening or when the opening is expanded by expansion of the anastomosis device.

FIGS. 1-5 illustrate the steps of punching and then removing the piercing element 14 from the side opening of the trocar 16 to allow the anastomosis device to be deployed through the lumen of the trocar. In FIG. 1, the piercing element 14 is in an extended piercing position. In this

5

position, the tissue punch is advanced into the target vessel wall. The tissue punch 10 is preferably advanced by spring actuated motion provided by a tool on which the tissue punch is mounted. Alternatively, the tissue punch may be advance manually.

As shown in FIG. 2, the piercing element 14 is withdrawn into the trocar 16 by pulling on the elongated member 18 (shown in FIG. 1). Once the distal tip 22 of the piercing element 14 clears the distal end of the opening 20, the piercing element is pivoted as it is retracted out of the opening 20 in the side of the trocar 16 as shown in FIGS. 3-5.

As shown in FIG. 1, the piercing element 14 includes two side pins 30 connected to the elongated member 18. The piercing element 14 is retracted by pulling on the elongated member 18 or other arrangement to accomplish punching of the tissue in the manner described above. During such retraction, a pin 34 on the underside of the piercing element 14 travels in a slot 36 in the trocar 16 until it reaches a stop 38 at the proximal end of the slot. When the pin 34 hits the stop 38, the piercing element 14 is caused to pivot about the stop as shown in FIG. 3.

Further retraction of the piercing element 14, as shown in FIG. 4, causes an inclined proximal surface 40 of the piercing element to contact an edge 42 of the trocar opening 20 such that the piercing element rotates out of the opening 20. As shown in FIG. 5, the piercing element continues to rotate to a storage position outside the trocar 16. When the piercing element is in the storage position, the inside of the trocar 16 can be used to maintain the opening in the blood vessel and for delivery of an anastomosis device to the incision in the target vessel.

FIGS. 6-24 illustrate alternative embodiments of tissue punches including tissue traps for trapping and retaining the plug of tissue which is cut by the tissue punch. The trapping of tissue plug prevents possible complications which could occur if the plug of tissue is released in the surgical site.

FIG. 6 illustrates a tissue punch 50 which includes a piercing element 54, a trocar 56, a tissue trap 58, and a collar 60. The tissue punch 50 is assembled as illustrated in FIG. 7 with the piercing element 54 positioned within the tubular tissue trap 58 with a pin 62 of the piercing element extending out through a slot 64 of the tissue trap. The tissue trap 58 includes two side pins 66 which extend through corresponding openings 68 in the collar 60. The side pins 66 also extend into cam slots 72 in the trocar 56. The piercing element 14 also includes a slot 74 at a proximal end which receives an elongated member 76 shown in FIG. 7. The elongated member 76 is preferably a spring steel strap which is used as a pull wire to pull the piercing element 54 into the tissue trap 58 and as a spring to move the piercing element and tissue trap out of the opening 78 in the side wall of the trocar 56.

The punching procedure using the tissue punch 50 of FIGS. 6-12 will be described with respect to the sequence of steps shown in FIGS. 7-12. In the assembled position illustrated in FIG. 7, the piercing element 54 pierces the tissue of the blood vessel wall by automatic or manual advancement of the tissue punch. As shown in FIG. 8, after piercing the piercing element 54 is withdrawn inside the tissue trap 58 by pulling on the elongated member 76 to cut a plug of tissue with a cutting edge 70 of the tissue trap 58.

As shown in FIGS. 9 and 10, as the piercing element 54 is withdrawn, the pin 62 slides along the slot 64. When the pin 62 contacts the curved proximal end of the slot 64 the piercing element is prevented from rotating by the spring

6

strap element 76 and the tissue trap is caused to rotate. When the tissue trap 58 rotates the side pins 66 rotate in the cam slot 72 unlocking the tissue trap and piercing element 54 from the trocar 56. As the tissue trap 56 is further withdrawn, as shown in FIG. 11, the tissue trap slides back into the opening 78 in the trocar 56. Finally, as shown in FIG. 12, the spring bias of the elongated spring member 76 causes the tissue trap 58 and piercing element 54 to be moved out of the trocar 56 to allow the lumen of the trocar to be used for deployment of a medical device, such as an anastomosis device.

The collar 60 of the tissue punch 50 is used as a spacer to hold the tissue trap 56 at a center of the trocar lumen. It should be understood that the collar 60 may be formed as a part of the tissue trap 58 or as a separate element.

FIGS. 13-18 illustrate an alternative embodiment of a tissue punch 80 having a bendable tab release system. As shown in the exploded view of FIG. 13, the tissue punch 80 includes a piercing element 84, a trocar 86, and a tissue trap 88. As in the embodiment of FIGS. 6-12, the piercing element 84 includes a proximal slot 90 for receiving an elongated member 92 which acts as a pull wire and spring. The tissue trap 88 includes a plurality of tabs 94 which are cut and folded out from the tube of the tissue trap. The trocar 86 includes a plurality of openings 96 for receiving the plurality of tabs 94. The plurality of openings 96 are also provided with slots 102 which extend to a distal end of the trocar 56.

As shown in FIG. 14, the tissue punch 80, in an assembled configuration prior to punching, axially has the tabs 94 positioned within the openings 96 to lock the tissue trap 88 in position axially with respect to the trocar 86. The tissue trap 88 is locked in place to allow cutting of the tissue with the cutting edge 98 of the tissue trap.

The steps of operating the tissue punch 80 according to FIGS. 13-18 are illustrated in the sequence of steps shown in FIGS. 14-18. In FIGS. 14 and 15 the tissue punch is shown assembled for punching. The tissue punch is advanced into the tissue of a target vessel wall automatically or manually. Once the target vessel wall has been penetrated, the piercing element 84 is withdrawn by pulling on the elongated member 92 to cut a plug of tissue with the cutting edge 98. FIG. 16 illustrates the position of the piercing element 84 after punching is complete.

As shown in FIG. 17, the piercing element 84 continues to be withdrawn until it abuts a stop member 100 inside the tissue trap 88. Continued withdrawal of the piercing element 84 pulls both the piercing element and the tissue trap 88 proximally and causes the tabs 94 to fold over allowing the tissue trap to be released from the trocar 86. As shown in FIG. 18, when the tissue trap 88 is released from the trocar 86, the spring force of the elongated member 92 moves the tissue trap and piercing element 84 out of the trocar.

FIGS. 19-24 illustrate a further embodiment of a tissue punch 110 having a snap release system. The tissue punch 110 includes a piercing element 114, a trocar 116, a tissue trap 118, and a collar 120. The collar 120 includes two legs 122 having tabs 124 at the ends. The collar 120 is fixed to the tissue trap 118. The tissue trap 118 has a cutting edge 126 and two slots 128 for accommodating the legs 122 and tabs 124 of the collar 120. The piercing element 114 has a tapered distal tip 130, a narrow shaft portion 132, and a larger shaft portion 134. In the assembled tissue penetrating position shown in FIGS. 20, 21, and 21A the tabs 124 are positioned adjacent the larger portion 134 of the shaft. The tabs 124 extend outward through openings 136 in the trocar 116 and

lock the collar 120 and tissue trap 18 in position with respect to the trocar 166.

After punching, the piercing element 114, tissue trap 118, and collar 120 are removed as follows. As the piercing element 114 is withdrawn by the elongated member 138 as shown in 22, 23, and 23A, the tabs 124 of the collar 120 are positioned adjacent the narrow portion of the shaft 132. This allows the tabs 124 to flex inward releasing the tabs from the openings 136 in the trocar 116. Once the collar 120 is released from the trocar 116, the piercing element 114, the tissue trap 118 and the collar 120 move out of the trocar 116 by the spring action of the elongated member 138 and allow the trocar to be used for insertion of a medical device.

FIGS. 25-30 illustrate a sequence of tissue punching with a double punch system for forming an opening in the wall of a blood vessel. The double punch system 150 is used to make openings larger than those made by a single punch embodiment. For openings larger than about 3 mm a double punch is preferred since a piercing element with a largest diameter of greater than about 3 mm tends to cause excessive trauma to the tissue.

As shown in FIG. 25, the double punch system 150 includes a piercing element 154 having a first anvil 156, a spreading element 158 having a second anvil 160 and a first cutter 162, and a sleeve 164 having a second cutter 166. As shown in the sequence of FIGS. 26-30, the piercing element 154 is first inserted through the tissue 170 of a blood vessel wall until the tissue rests around a shaft 172 of the piercing element. The spreading element 158 is then moved downwards as shown in FIG. 27 to cut a first plug of tissue 174 with the first cutter 162. The first plug 174 is contained within an interior of the spreading element 158 which forms a tissue trap.

As shown in FIG. 28 the spreading element 158 is then advanced through the tissue 170 until the tissue rests around a shaft 178 of the spreading element. The sleeve 164 is then advanced, as shown in FIG. 29, to cut a second plug of tissue 180 with the second cutter 166. The second plug of tissue 180 is contained within the sleeve 164 which forms a tissue trap.

FIG. 30 illustrates the withdrawal of the double punch system 150 containing the two annular plugs 174, 180 of tissue and leaving a tissue opening 184.

It should be understood that the double punch system is illustrated as a system for forming holes which are larger than an approximately 3 mm hole which can be easily formed with a single punch system. The double punch system can form holes of up to about 8 mm in diameter without causing tissue trauma. In order to make holes of larger diameters additional spreading elements and cutting elements can be used to form a triple punch system or other multiple punch system.

While the invention has been described in detail with reference to the preferred embodiments thereof, it will be apparent to one skilled in the art that various changes and modifications can be made and equivalents employed, without departing from the present invention.

What is claimed is:

1. A method for removing a plug of tissue from the wall of a vessel, the method comprising:

piercing the wall of the vessel with a piercing element to allow introduction of a tubular element;

retracting the piercing element into the tubular element which is substantially coaxially located within an introducer to remove a plug of tissue from the vessel wall; and

moving the piercing element and the tubular element to allow introduction of an object into the vessel through the introducer.

2. The method of claim 1, wherein the step of moving involves removing the piercing element and the tubular element through a side wall of the introducer.

3. The method of claim 1, further comprising a step of retracting the piercing element and the tubular element into a second tubular element to remove a second plug of tissue from the vessel wall.

4. The method of claim 1, wherein said moving comprises moving the piercing element and the tubular element in a direction away from an axis of the introducer.

5. The method of claim 1, wherein the object is an anastomosis device.

* * * * *